




The Innovator

Filter head with versatile connection technology

The BWT besthead FLEX filter head fits all BWT water+more filter cartridges, making it very simple to optimize water at the point of use. The filter head's user-friendly venting is extraordinarily simple to operate, while the bypass control that snaps into place ensures the right setting is made.

With its one-of-a-kind FLEX Insert interface, no tools are required to integrate water filters with matching connecting hoses into existing supply line systems. FLEX Insert attachments in various formats can be used, thanks to the socket that is adjustable in 30° steps. This ensures the space-saving installation of filters and safe supply line routing with no kinks.

BWT besthead FLEX features two DVGW-compliant backflow prevention devices. These stop water from flowing back into the drinking water pipeline or filter cartridge while also preventing any accidental leaks. Both the filter head and its accessories are pressure-resistant and safe. Made from food-grade materials, they can be utilized in any drinking water system worldwide.

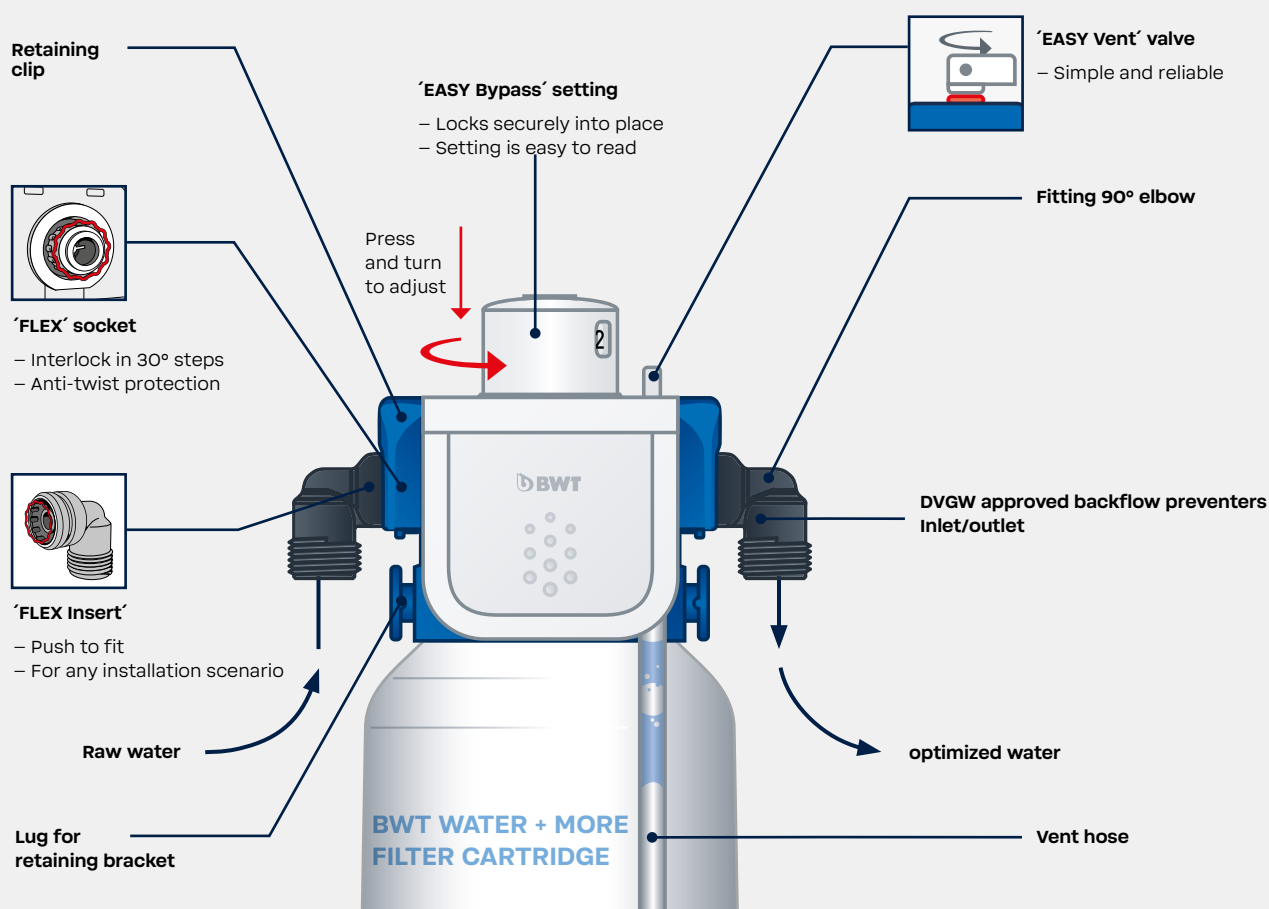



TECHNICAL DATA

Dimensions	
Width in mm	130
Height in mm	105
filter head order no. ⁽¹⁾	FS00Z20A00

⁽¹⁾ Supplied with 2x 90° elbow fittings, FLEX Insert with 3/8" ext. thread made from GFP. Subject to change.

Operating conditions

Input pressure:	2 – 8 bar
Water temperature:	4 – 30 °C
Ambient temperature:	4 – 40 °C

BWT besthead FLEX filter head with a wide choice of connection options to ensure simple, space-saving installation of BWT water+more filter cartridges.

ACCESSORIES

Description	Order number
Straight fitting	
FLEX straight connector x male thread 3/8"	FS00Z21A00
FLEX straight connector x male thread 1/2"	FS00Z22A00
FLEX straight connector x male thread 3/4"	FS00Z23A00
FLEX straight connector x JG Ø 8 mm	FS00Z24A00
FLEX straight connector x JG Ø 3/8"	FS00Z25A00
Connector 90° elbow	
FLEX 90° elbow connector x male thread 3/8"	FS00Z26A00
FLEX 90° elbow connector x male thread 1/2"	FS00Z27A00
FLEX 90° elbow connector x male thread 3/4"	FS00Z28A00
FLEX 90° elbow connector x JG Ø 6 mm	FS00Z41A00
FLEX 90° elbow connector x JG Ø 8 mm	FS00Z29A00
FLEX 90° elbow connector x JG Ø 10 mm	125696942
FLEX 90° elbow connector x JG Ø 1/4"	FS00Z42A00
FLEX 90° elbow connector x JG Ø 3/8"	125696941
Connecting hoses with 90° connection	
BWT hose set FLEX 1, connection hose DN 8, 1.5 m, FLEX 90° elbow connector x female thread 3/8"	FS00Z32A00
BWT hose set FLEX 2, connection hose DN 8, 1.5 m, FLEX 90° elbow connector x female thread 1/2"	FS00Z33A00
BWT hose set FLEX 3, connection hose DN 8, 1.5 m, FLEX 90° elbow connector x female thread 3/4"	FS00Z34A00
BWT hose set FLEX 4, connection hose DN 8, 1.5 m, with ball valve, FLEX 90° elbow connector x female thread 3/8"	FS00Z35A00
Connecting hoses with straight connection	
BWT hose set FLEX 5, connection hose DN 8, 1.5 m, FLEX straight connector x female thread 3/8"	FS00Z36A00
BWT hose set FLEX 6, connection hose DN 8, 1.5 m, FLEX straight connector x female thread 1/2"	FS00Z37A00
BWT hose set FLEX 7, connection hose DN 8, 1.5 m, FLEX straight connector x female thread 3/4"	FS00Z38A00
Connectors	
FLEX T-connector	FS00Z40A00
Mounting brackets	
Mounting bracket for under-counter installation	FS00Y66A00
Extension for mounting bracket for filter cartridges size 2XL, wall mounting	FS00Y73A00
BWT besthead FLEX – Set 1	
– BWT besthead FLEX with 2 x FLEX 90° elbow connectors x male thread 3/8"	FS00Z39A00
– Connection hose DN 8, 1.5 m, with ball valve, FLEX 90° elbow connector x female thread 3/8"	
– FLEX straight connector x male thread 3/8"	
– Reducer female thread 3/4" x male thread 3/8"	

MANUFACTURER: SALES:

BWT Holding GmbH:
Walter-Simmer-Str. 4
5310 Mondsee, Austria
bwt-wam.com

**BWT water+more
Deutschland GmbH:**
info@water-and-more.de
Tel.: +49 611 58019-0